



1825 VIA BURTON  
ANAHEIM CA 92806  
714-772-5202 / FAX 714-772-2302  
EMAIL: MAIL@MAJORMFG.COM  
WEB: WWW.MAJORMFG.COM

**INSTRUCTIONS  
HIT-66-264  
FOR  
ONITY HT SERIES  
MORTISE LOCK**


**WHEN USING POWER TOOLS  
ALWAYS WEAR  
EYE AND EAR PROTECTION!!**

# **THINK SAFETY!!**

**WHEN USING POWER TOOLS  
ALWAYS WEAR  
EYE PROTECTION!!**

Before attempting any installation know how to safely use the power tools involved. Be sure all bits and cutters are sharp and in good condition and all power tools and extension cords are in good working order and properly grounded. **AND MOST IMPORTANTLY, BE SURE TO WEAR, EYE AND EAR PROTECTION.**

Copyright 2010—Major Manufacturing

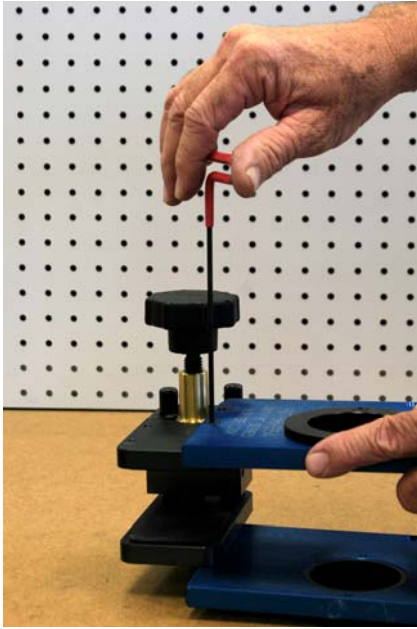

With both clamps opened equally, install both inside and outside templates to the HIT-66 clamp as shown. Do not tighten the 10-32 screws at this time. When all screws have been loosely installed, then it is ok to tighten.



Install the alignment guide to either side of the template set. This is used to align the template with the mortise pocket.




Shown is a standard mortise pocket, we will use this as a basis for the Onity install. If the holes for the mortise lock are not drilled, use the HIT-4509 alignment fixture and a center drill to drill the pilot holes. Do not try to “eyeball” the center and drill a hole or use an awl.





Install the mortise lock positioning plate. The plate will fit into the 1-1/4" x 8" faceplate cut out. There will be a 3/8" diameter pin centered on the plate. There is no top or bottom to worry about.

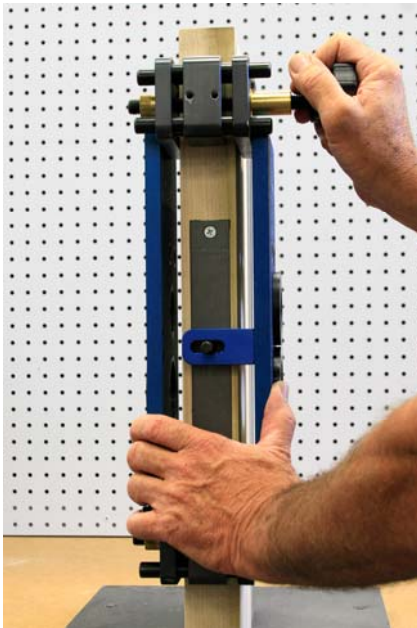


Slide the HIT-66 template with the alignment guide alignment pin and tighten to door. Alternate tightening between the top and bottom clamp. Do not attempt to tighten one clamp all the way at once.



With a good quality hole saw, drill the 2-1/8" hole to the mortise pocket on both sides of the door.

All hole saws are not created equal. A cheap hole saw from a home improvement center or one that has been dropped can be out of round and will not fit the drill



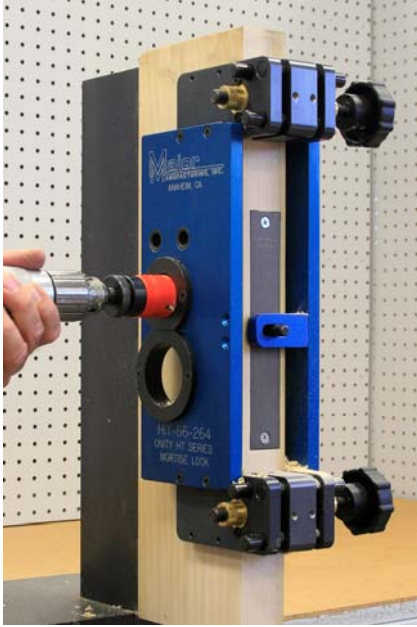

Change to a 1-1/2" hole saw and drill the two 1-1/2" holes to the mortise pocket.



Using a 1/2" twist drill, drill the two upper holes.

Drill these half way from both sides of the door.



When all holes have been drilled remove the The HIT-66 drill guide from the door.



**Completed lock prep.  
Install lock per manufacturers directions.**

**That's all there is to it!**

**Visit our web site at [www.majormfg.com](http://www.majormfg.com) for more information on lock templates and a complete listing of all the tools we have available. While there, sign up for our newsletter and we will email new product information directly to you.**